

P R
B X

POWERBOX Industrial Line
PQAE100U Series
Up to 100W 12:1 Single Output
High Performance
DC/DC Converter



Features

- No minimum load required
- Low standby power consumption
- 2250 VDC input to output basic insulation
- Built to meet UL60950-1, EN60950-1, & IEC60950-1

Input

Input voltage range	36Vin(nom)	9 ~ 75VDC
	72Vin(nom)	14 ~ 160VDC
Start-up voltage	36Vin(nom)	9VDC, max
	72Vin(nom)	14VDC, max
Shutdown voltage	36Vin(nom)	7.3 ~ 8.1VDC
	72Vin(nom)	10 ~ 12VDC
Start up time	Power up	75mS, typ
	Remote ON/OFF	75mS, typ
	Constant resistive load	
Input transient voltage	36Vin(nom)	8.1VDC, min
(100ms, max)	72Vin(nom)	12VDC, min
Input surge voltage	36Vin(nom)	100VDC, max
(1second, max)	72Vin(nom)	185VDC, max
Input filter ¹⁾	Pi type	
Remote ON/OFF	Referred to -Vin pin	
	Negative logic DC-DC ON	Short or 0~1.2V
	(Standard) DC-DC OFF	Open or 3~12V
	Positive logic DC-DC ON	Open or 3~12V
	(Option) DC-DC OFF	Short or 0~1.2V
	Input current of Ctrl pin	0.5mA ~ 1mA
	Remote off input current	3mA typ.

Output

Voltage accuracy	$\pm 1\%$.	
Line regulation	LL to HL at full load	± 0.1
Load regulation	No load to full load	± 0.1
Voltage adjustability	-20% min, +10% max. Max output deviation is inclusive of remote sense.	
Remote sense	10% of Vout (nom). If remote sense is not being used, SENSE pins should connected to corresponding polarity OUTPUT pins.	
Ripple and noise	Measured by 20MHz bandwidth.	
With a 1 μ F/25V X7R MLCC and a 22 μ F/25V POS-CAP	5Vout	75mVp-p
With a 22 μ F/25V X7R MLCC	12Vout, 15Vout	100mVp-p
With a 4.7 μ F/50V X7R MLCC	24Vout, 28Vout	200mVp-p
With a 2.2 μ F/100V X7R MLCC	48Vout, 53Vout	300mVp-p
Temperature coefficient	$\pm 0.02\%/\text{°C}$.	
Transient response	25% load step change	250 μ s typ

Over voltage protection of Vout (nom); hiccup mode 120~135%

Over load protection of Iout rated; hiccup mode 110-130%

Short circuit protection Continuous, automatics recovery.

Environmental

Operating temperature	Baseplate -40°C to +105°C with derating.
Max case temperature	+105°C max.
Overtemp protection	+110°C typ.
Storage temperature	-55°C to +125°C.
Thermal impedance	DC/DC module 8.27°C/W
	Mount on the iron base-plate 2.43°C/W
	Heatsink with 0.24"height 7.40°C/W
	Heatsink with 0.5"height 6.16°C/W
Thermal shock	EN61373, MIL-STD-810F.
Vibration	EN61373, MIL-STD-810F.
Relative humidity	5-95% RH.

General

Isolation voltage	72Vin(nom) 1 minute (reinforced insulation)
Input to output	3000VAC min
Input (output) to base-plate	1500VAC min
	36Vin(nom) 1 minute (basic insulation)
Input to output	2250VDC min
Input (output) to base-plate	1600VDC min
Isolation resistance	500VDC 1GW min.
Isolation capacitance	1000pF, typ.
Switching frequency	180KHz, typ.
Case material	Aluminum base-plate with plastic case.
Potting material	Silicon (UL94-V0).
MTBF	MIL-HDBK-217F, full load TBD
Weight	64g.

Standards

Safety standards	IEC/ UL/ EN60950-1, IEC/ UL/ EN62368-1 (pending).
	Railway EN50155, EN45545-2 (pending).

POWERBOX Industrial Line

PQAE100U Series

Up to 100W 12:1 Single Output

High Performance

DC/DC Converter


EMC Parameter	Conditions	Level
EMI	EN55011, EN55032	Class A, Class B
ESD	EN61000-4-2	Perf. Criteria A
Radiated immunity	EN61000-4-3	Perf. Criteria A
Fast transient	EN61000-4-4	Perf. Criteria A
	PQAE100-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220μF/100V)
	PQAE100-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150μF/200V)
Surge	EN61000-4-5	EN55024:±1kV and EN50155:±2kV
	PQAE100-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220μF/100V)
	PQAE100-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150μF/200V)
Conducted immunity	EN61000-4-6	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second
		Perf. Criteria A

Note:

1. Input source impedance: The power module will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor. The PQAE100-36S□□U recommended Nippon Chemi-con KY series, 220μF/100V.
2. BASE-PLATE GROUNDING: When connect two screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

Derating Curve

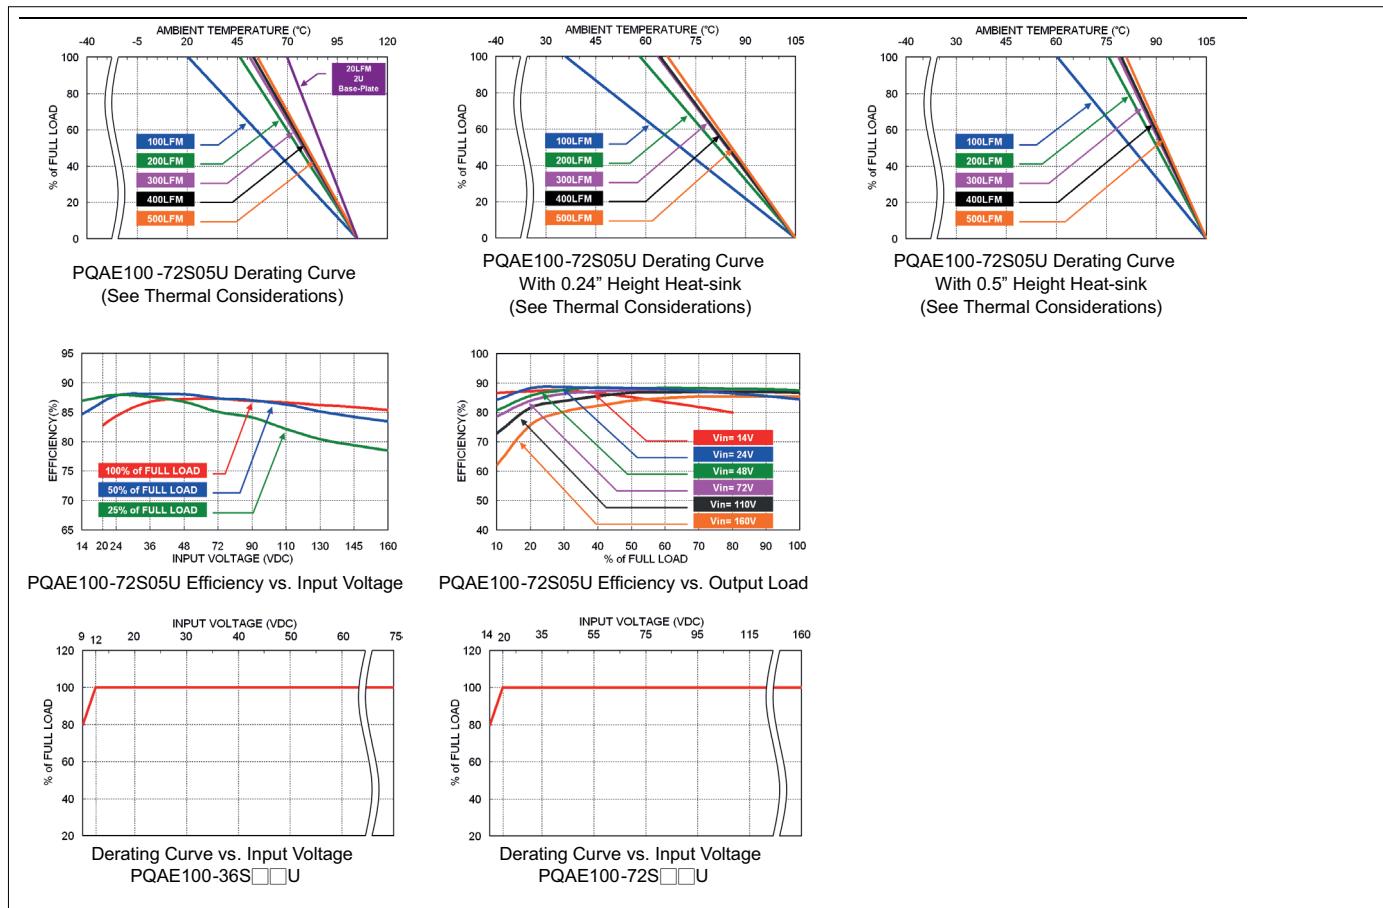

POWERBOX Industrial Line

PQAE100U Series

Up to 100W 12:1 Single Output

High Performance

DC/DC Converter

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Max Capacitor Load
PQAE100-36S05U	9 ~ 75 VDC	5 VDC	20 A	20 mA	88%	40000 µF
PQAE100-36S12U	9 ~ 75 VDC	12 VDC	8.4 A	20 mA	88%	7000 µF
PQAE100-36S15U	9 ~ 75 VDC	15 VDC	6.7 A	20 mA	88%	4500 µF
PQAE100-36S24U	9 ~ 75 VDC	24 VDC	4.2 A	20 mA	88%	1800 µF
PQAE100-36S28U	9 ~ 75 VDC	28 VDC	3.6 A	20 mA	88%	1300 µF
PQAE100-36S48U	9 ~ 75 VDC	48 VDC	2.1 A	20 mA	87%	430 µF
PQAE100-36S53U	9 ~ 75 VDC	53 VDC	1.9 A	20 mA	87%	370 µF
PQAE100-72S05U	14 ~ 160 VDC	5 VDC	20 A	12 mA	88%	40000 µF
PQAE100-72S12U	14 ~ 160 VDC	12 VDC	8.4 A	15 mA	88%	7000 µF
PQAE100-72S15U	14 ~ 160 VDC	15 VDC	6.7 A	15 mA	88%	4500 µF
PQAE100-72S24U	14 ~ 160 VDC	24 VDC	4.2 A	12 mA	88%	1800 µF
PQAE100-72S28U	14 ~ 160 VDC	28 VDC	3.6 A	12 mA	88%	1300 µF
PQAE100-72S48U	14 ~ 160 VDC	48 VDC	2.1 A	12 mA	87%	430 µF
PQAE100-72S53U	14 ~ 160 VDC	53 VDC	1.9 A	12 mA	87%	370 µF

Part Number Structure

PQAE100 - 72		S	05	U	-	P	HS
Series Name		Input Voltage	Output Quantity	Output Voltage	Input Range	CTRL and Pin Options	Assembly Options
36: 9-75VDC	S: Single	05: 5VDC	05: 5VDC	8:1	<input type="checkbox"/> Negative logic	<input type="checkbox"/> None	
72: 14-160VDC		12: 12VDC	12: 12VDC	12:1	0.150" pin length	HS: 7G-0029B-F; 0.24"	
		15: 15VDC	15: 15VDC		L: Negative logic	HS1: 7G-0030B-F; H=0.5"	
		24: 24VDC	24: 24VDC		0.200" pin length	HS2: 7G-0031B-F; H=0.24"	
		28: 28VDC	28: 28VDC		P: Positive logic	HS3: 7G-0032B-F; 0.5"	
		48: 48VDC	48: 48VDC		0.150" pin length	TH: Throught hole (no thread)	
		53: 53VDC	53: 53VDC		S: Positive logic		
					0.200" pin length		

* The module can't equip Heat-sink with TH option.

Fuse Consideration


This power module is not internally fused. An input line fuse must always be used. This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture. To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as follows:

Model	Fuse Rating (A)	Fuse Type
PQAE100-36S□□U	20	Fast-Acting
PQAE100-72S□□U	13	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

POWERBOX Industrial Line
 PQAE100U Series
 Up to 100W 12:1 Single Output
 High Performance
 DC/DC Converter

Mechanical

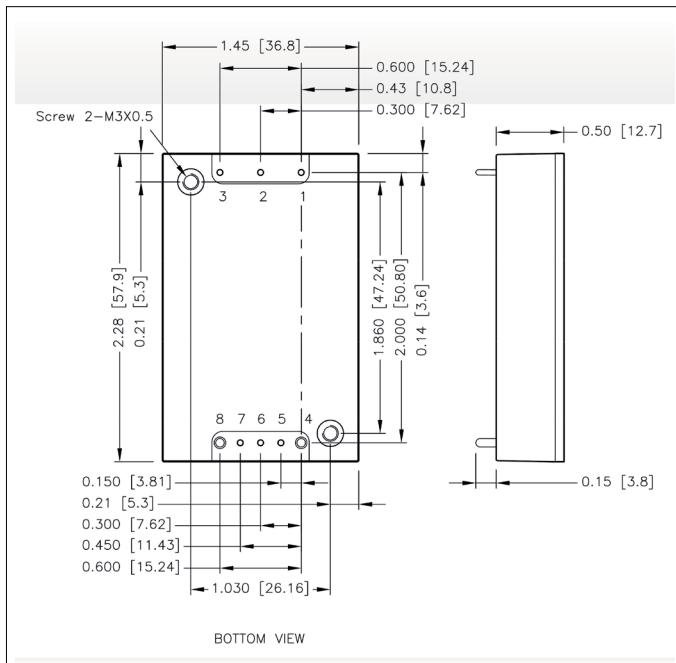


Pin Connection

Pin	Define	Diameter
1	- Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+ Vin	0.04 Inch
4	- Vout	0.06 Inch
5	- Sense	0.04 Inch
6	Trim	0.04 Inch
7	+ Sense	0.04 Inch
8	+ Vout	0.06 Inch

1. All dimensions in inch [mm]
2. Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$]
 $x.xxx \pm 0.01$ [$x.xx \pm 0.25$]
3. Pin pitch tolerance ± 0.01 [0.25]
4. Pin dimension tolerance ± 0.004 [0.10]
5. The screw locked torque: MAX 3.5kgf-cm [0.34N·m]

Recommended Pad Layout

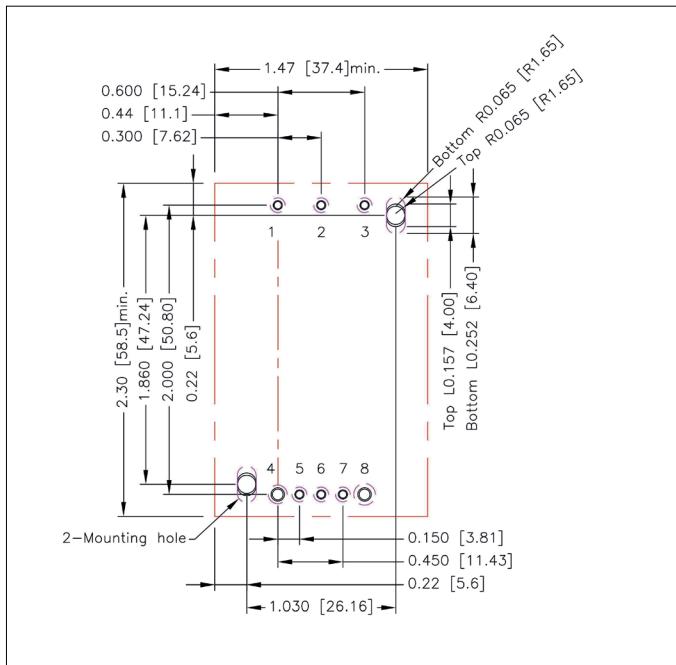


All dimensions in inch[mm]
 Pad size(lead free recommended) Through hole 1.2.3.5.6.7: 00.051[1.30]
 Through hole 4.8: 00.075[1.90] Through hole of mounting: 00.126[3.20]
 Top view pad 1.2.3.5.6.7: 00.064[1.63]
 Top view pad 4.8: 00.094[2.38]
 Top view pad of mounting:Groove R0.065[1.65]L0.157[4.00] Bottom
 view pad 1.2.3.5.6.7: 00.102[2.60]
 Bottom view pad 8: 00.150[3.80]
 Bottom view pad 4: 00.130[3.30]
 Bottom view pad of mounting:Groove R0.065[1.65]L0.252[6.40]

POWERBOX Industrial Line
PQAE100U Series
Up to 100W 12:1 Single Output
High Performance
DC/DC Converter

Thermal Considerations


The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

Thermal test condition with vertical direction by natural convection (20LFM). The iron base-plate dimension is 19" X 3.5" X 0.063" (The height is EIA standard 2U). The heat-sink is optional and P/N: 7G-0029B-F , 7G-0030B-F , 7G-0031B-F , 7G-0032B-F

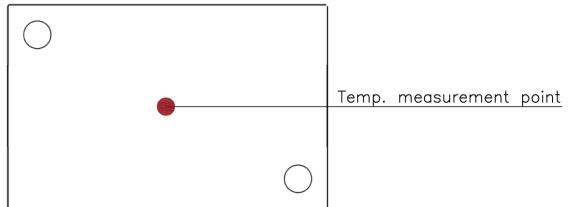


Heat-Sink Type Options


PQAE100-□□S-□□U-HS
7G-0029B-F

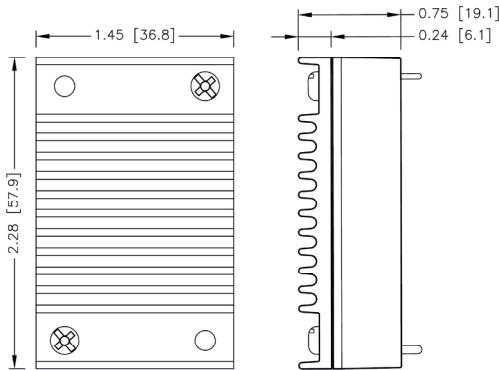


PQAE100-□□S-□□U-HS1
7G-0030B-F

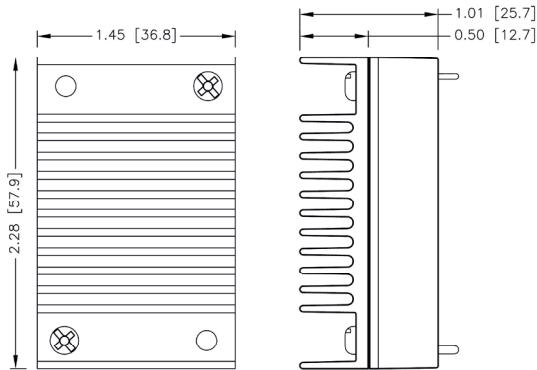

PQAE100-□□S-□□U-HS2
7G-0031B-F

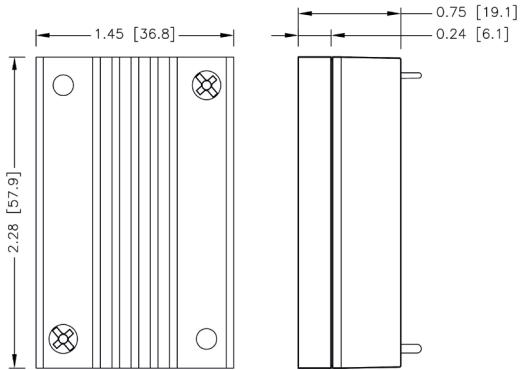

PQAE100-□□S-□□U-HS3
7G-0032B-F

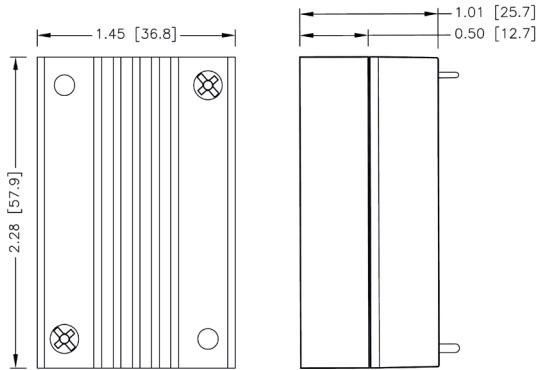

1. All dimensions in inch [mm]

2. Tolerance :x.xx±0.02 [x.x±0.5]

POWERBOX Industrial Line
PQAE100U Series
Up to 100W 12:1 Single Output
High Performance
DC/DC Converter

Output Voltage Adjustment

Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins. With an external resistor between the Trim and -Sense pin, the output voltage set point decreases. With an external resistor between the Trim and +Sense pin, the output voltage set point increases. Maximum output deviation is +10% inclusive of remote sense. The external TRIM resistor needs to be at least 1/8W of rated power.

Trim Up Equation


$$R_U = \left(\frac{5.11V_{OUT}(100 + \Delta\%) - 511 + 10.22\Delta\%}{1.225\Delta\%} \right) k\Omega$$

Trim Down Equation

$$R_D = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

External Output Trimming

Output can be externally trimmed by using the method shown below.

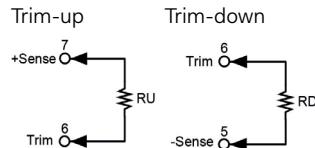

Trim Up

□□S05U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU	(k Ω)	1585.35	797.994	535.542	404.316	325.58	273.09	235.596	207.476	185.605	168.109

□□S12U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU	(k Ω)	4534.55	2287.19	1538.08	1163.52	938.78	788.956	681.939	601.676	539.25	489.309

□□S15U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU	(k Ω)	5798.49	2925.42	1967.73	1488.89	1201.58	1010.04	873.229	770.619	690.812	626.966

□□S24U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU	(k Ω)	9590.32	4840.11	3256.7	2465	1989.98	1673.3	1447.1	1277.45	1145.5	1039.94

□□S28U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	28.28	28.56	28.84	29.12	29.40	29.68	29.96	30.24	30.52	30.80
RU	(k Ω)	11275.58	5691.08	3829.58	2898.83	2340.38	1968.08	1702.151	1502.705	1347.58	1223.48

□□S48

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU	(k Ω)	19701.9	9945.94	6693.96	5067.97	4092.38	3441.99	2977.42	2628.99	2357.99	2141.19

□□S53U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	53.53	54.06	54.59	55.12	55.65	56.18	56.71	57.24	57.77	58.30
RU	(k Ω)	21808.437	11009.651	7410.056	5610.259	4530.38	3810.461	3296.233	2910.562	2610.596	2370.623

Trim Down

□□S00U

ΔV	(%)	1	2	3	4	5	6	7	8	9	10
RD	(k Ω)	500.78	245.28	160.113	117.53	91.98	74.947	62.78	53.655	46.558	40.88
ΔV	(%)	11	12	13	14	15	16	17	18	19	20
RD	(k Ω)	36.235	32.363	29.088	26.28	23.847	21.718	19.839	18.169	16.675	15.33

Specifications are subject to change without notice.